


NEX 980

ATX, Socket LGA1155 3rd/2nd Generation Intel® Core™ i7/i5/i3, Q77
4 x DDR3, DP/HDMI/VGA, PCIe16/PCIe4/4PCI/PCIe1/mPCIe, mSATA/CFast

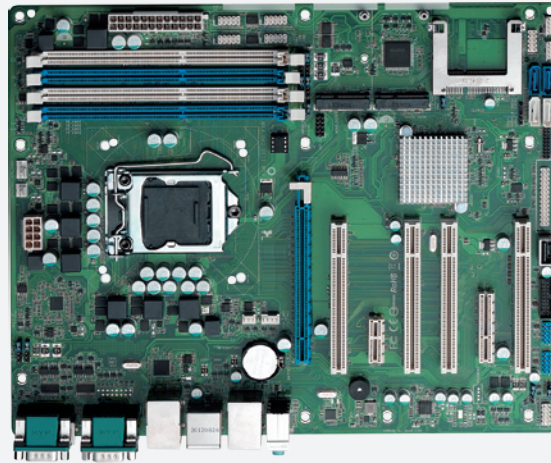

Main Features

- Support Socket LGA 1155 for 3rd/2nd Generation Intel® Core™ i7/i5/i3, Celeron® Processors
- 4 x DDR3 DIMM Socket up to 32 GB
- Support DisplayPort/HDMI/VGA dual displays
- 2 x Intel® GbE, 4 x SATA3.0/2.0, mSATA, CFast, 12 x USB3.0/2.0, 6 x COM, 8 x GPIO
- 1 x PCIe16, 1 x PCIe4, 1 x PCIe1, 1 x mPCIe, 4 x PCI (v2.3)
- Support AT/ATX mode by ATX Power Input

Product Overview

NEX 980 is an industrial motherboard with Standard ATX form factor, which support 3rd and 2nd generation Intel® Core™ i7/i5/i3 Celeron® processors. NEX 980 support dual channel DDR3 1600/1333/1066MHz memory in four long DIMMs up to 32GB system memory and PCIe16 (3.0/2.0 by CPU). The Q77 PCH support multiple displays by three DDI (digital display interfaces) by HDMI/DP ports as well as legacy VGA. Intel® Q77 PCH manages up to 2 x SATA 3.0/2 x SATA 2.0 with software RAID 0/1/5/10 supported and performs up to 12 x USB (4 x USB3.0/8 x USB2.0) ports. NEX 980 support PCIe4, PCIe1, mPCIe, legacy 4 x PCI slots, dual Intel® GbE ports and up to 6 x COM incl. 2 x RS232/422/485. NEX 980 could be integrated into 1U/2U/4U rack mounted chassis or Desktop Towers as completed system solution for widely industrial applications in the new era of digital infrastructure with NEXCOM.

Specifications

CPU Support

- Socket LGA1155, 3rd or 2nd generation Intel® Core™ i7/i5/i3, Celeron® processors

Main Memory

- 4 x 240-pin dual channel long DIMMs support DDR3 1066/1333/1600Mhz up to 32GB system memory

Chipset

- Intel® Q77 Platform Controller Hub

BIOS

- AMI BIOS UEFI
- Plug and play support

On-board LAN

- 1 x Intel® 82579V/LM PHY for AMT 8.0
- 1 x Intel® 82583V PCI Express Gigabit Ethernet
- Support boot from LAN (PXE)
- 2 x RJ45 with LEDs

Display

- 3rd or 2nd generation Intel® Core™ socket LGA1155 processors Integrated HD graphics
- 1 x HDMI
- 1 x DisplayPort
- 1 x VGA

Expansion

- 1 x PCIe16 (Gen. 3.0/2.0 by CPU)
- 1 x PCIe4
- 1 x PCIe1
- 4 x PCI (v2.3)

Edge I/O Interfaces


- 1 x Combo for PS2 KB/MS
- 2 x stack DB9 for COM1 & COM2
- 1 x DisplayPort
- 1 x HDMI with dual stack USB2.0 (black)
- 1 x VGA
- 2 x RJ45 with dual stack USB3.0 (blue) and dual stack USB2.0 (black) connectors
- Line-In/Line-out/MIC phone jack

I/O Interface

- USB3.0: 4 ports (2 x USB3.0 on edge I/O, 2 x internal box-header)
- USB2.0: 8 ports (4 x USB2.0 on edge I/O, 4 x internal box-header)
- Serial: 6 ports (default 2 x RS232 pre-selected RS422/485 in BIOS, 4 x RS232 by internal pins-header)
- SATA HDD: 4 ports, port 0, 1 support SATA 3.0, port 2, 3 support SATA 2.0, dual SATA Power by 2 x 4 x pins
- Support Software RAID 0/1/5/10 and Intel® Matrix Storage
- GPIO: Supports 4 x GPI and 4 x GPO with TTL level (5V or 12V by Jumper)



Block Diagram

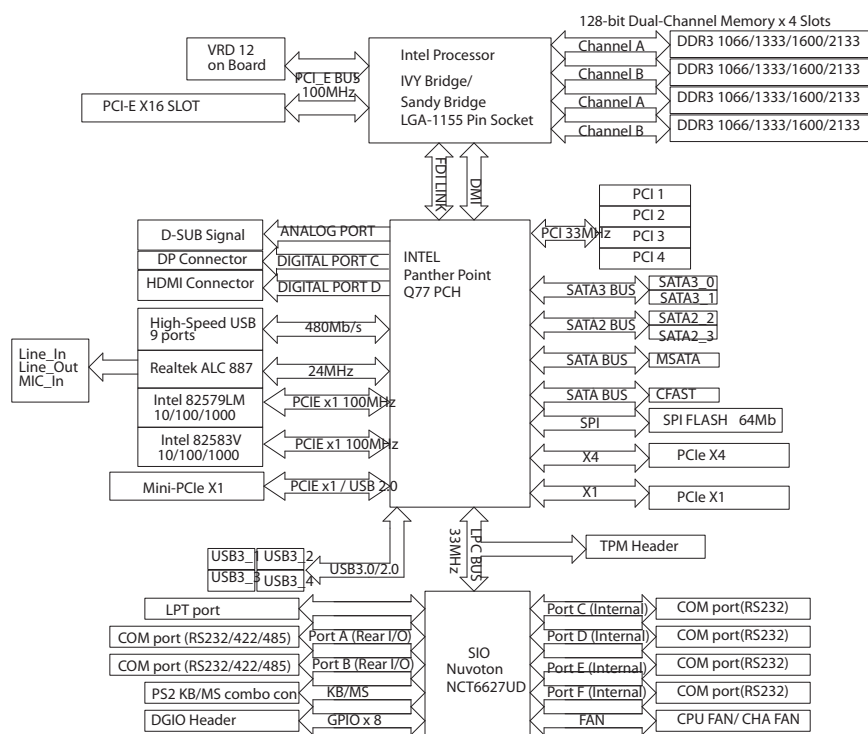

Interface:

- Onboard buzzer x1
- 9 x pins system header for Power LED/Power On/Reset/HDD LED
- 1 x 4-pin fan connector (for CPU); 1 x 3-pin fan connectors (For CPU or System)
- On-chip RTC with battery/CR2032 backup holder onboard

System Monitor

- 4 Voltages (+3.3V, +5V, +12V, Vcore)
- 2 Temperatures (For CPU and System)
- 3 FAN speed monitors (1 for CPU and 2 for Chassis Fan/System)

Power Input

- Support AT/ATX mode
- Standard ATX 24-pin connector for +12V/+5V/+3.3V/+5VSB/-12V
- ATX 4-pin connector for +12V

Dimensions

- ATX
- Dimension: Lx W, 305mm x 244mm; 12"x 9.6"

Environment

- Board level operating temperatures: 0°C to 60°C
- Storage temperature: -20°C to 85°C
- Relative humidity: 10% to 90%, (Non-condensing)

Certifications

- Meet CE
- Meet FCC

Ordering Information

♦ NEX 980-10PBK (P/N : 10G00098001X0)

Bulk-Packed 10 x pcs ATX, LGA1155 of 3rd/2nd Generation Intel® Core™ i7/i5/i3, Celeron® processors, Q77 with 4 x DDR3/DIMM, HDMI/DP/VGA, PCIe16/PCIe4/PCIe1/4PCI/mPCIe, 2 x SATA3.0/2 x SATA 2.0, 4 x USB3.0/8 x USB2.0, 2 x GbE, 6 x COM, mSATA, CFAST and ATX Power Input